


Commercial

MANUFACTURING

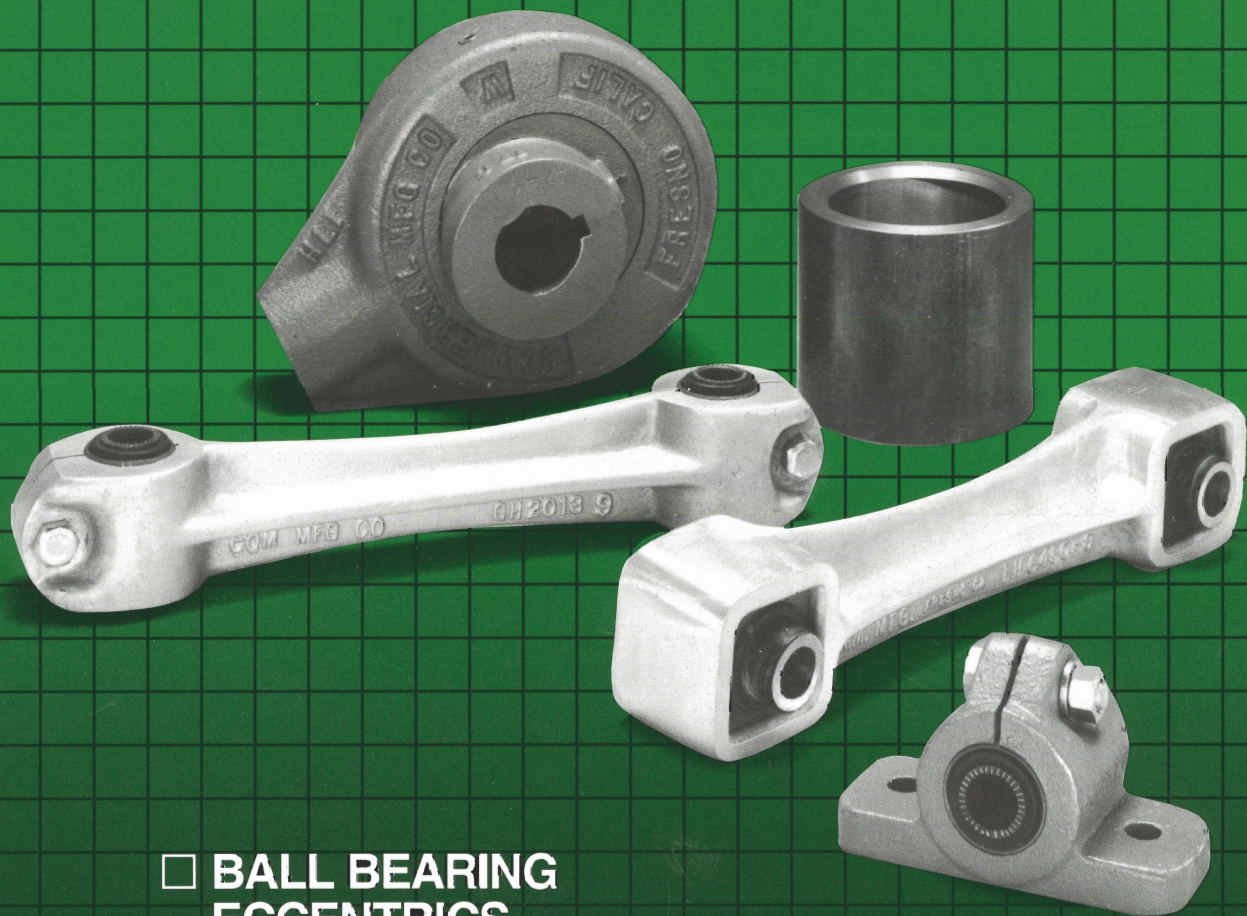

☐ BALL BEARING
ECCENTRICS

☐ RUBBER MOUNTED SHAKER HANGERS

☐ CONNECTING ARMS

Designed for feeders, conveyors, graders and vibrators used in food processing and other industrial machinery.

BALL BEARING ECCENTRICS



Made in various sizes to fit
any required application.
Stock list for immediate delivery.
Special sizes available on request.

STANDARD FEATURES:

- Cast iron construction
- Enamel painted outer surfaces
- Bolt together assembly
- Radial ball bearing
- Felt seals

OPTIONAL FEATURES:

- Neoprene seals
- Alternate stem sizes (E Dim.)
- Alternate keyway sizes
- Alternate surface coatings

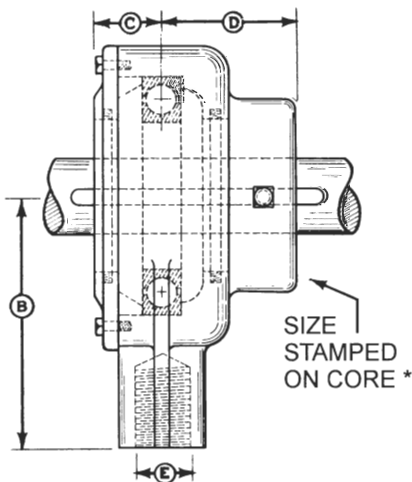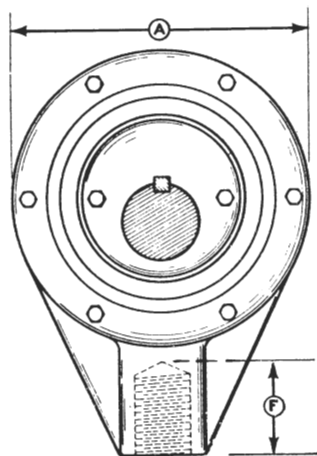

* When "N" follows last digit it
indicates Neoprene Seals.

Dimensions in inches unless otherwise noted.

Ecc. No.	Shaft Dia.	Throw	Travel	Bearing No.	Bearing **Cap (In LBF)	A	B	C	D	NC Thread E	F	Key Seal	Lbs. Each
L1-2	1	1/8	1/4	9112K	2,470	4 3/4	3 3/4	1	1 3/4	3/4	1 1/4	1/4	9
L1-4	1	1/4	1/2										
L1-6	1	3/8	3/4										
L1-8	1	1/2	1										
L1-10	1	5/8	1 1/4										
L13-2	1 3/16	1/8	1/4										
L13-3	1 3/16	3/16	3/8										
L13-4	1 3/16	1/4	1/2										
L13-6	1 3/16	3/8	3/4										
L13-8	1 3/16	1/2	1										
L14-4	1 1/4	1/4	1/2	212K	4,340	5 1/2	4 1/4	1 1/4	2 1/4	3/4	1 1/2	1/4	14
L14-6	1 1/4	3/8	3/4										
1-6	1	3/8	3/4										
13-3	1 3/16	3/16	3/8										
13-4	1 3/16	1/4	1/2										
13-6	1 3/16	3/8	3/4	214K	5,200	6 1/8	4 3/4	1 1/2	2 1/4	1	1 1/2	3/8	18
13-8	1 3/16	1/2	1										
14-6	1 1/4	3/8	3/4										
14-8	1 1/4	1/2	1										
16-6	1 3/8	3/8	3/4										
16-8	1 3/8	1/2	1										
17-2	1 7/16	1/8	1/4										
17-3	1 7/16	3/16	3/8										
17-4	1 7/16	1/4	1/2										
17-6	1 7/16	3/8	3/4										
17-8	1 7/16	1/2	1										
17-10	1 7/16	5/8	1 1/4										
111-3	1 11/16	3/16	3/8										
111-4	1 11/16	1/4	1/2										
111-6	1 11/16	3/8	3/4	216W	8,500	7	5 1/4	1 3/4	2 3/4	1	1 5/8	3/8	25
18-4	1 1/2	1/4	1/2										
18-6	1 1/2	3/8	3/4										
18-8	1 1/2	1/2	1										
111-8	1 11/16	1/2	1										
111-10	1 11/16	5/8	1 1/4	219W	12,500	8 1/2	6 3/4	1 7/8	3 1/4	1 1/4	2 1/4	1/2	43
115-2	1 15/16	1/8	1/4										
115-3	1 15/16	3/16	3/8										
115-4	1 15/16	1/4	1/2										
115-6	1 15/16	3/8	3/4										
115-8	1 15/16	1/2	1										
23-6	2 3/16	3/8	3/4										
115-10	1 15/16	5/8	1 1/4										
115-12	1 15/16	3/4	1 1/2										
23-8	2 3/16	1/2	1										
23-10	2 3/16	5/8	1 1/4	220W	14,000	9	7 3/4	2 1/8	4	1 1/4	2 1/2	1/2	64
24-3	2 1/4	3/16	3/8										
24-6	2 1/4	3/8	3/4										
24-8	2 1/4	1/2	1										
24-10	2 1/4	5/8	1 1/4										
27-4	2 7/16	1/4	1/2	222W	16,500	10	8 1/2	2 3/8	4 1/2	1 1/2	2 3/4	1/2	84
27-6	2 7/16	3/8	3/4										
27-8	2 7/16	1/2	1										
27-11	2 7/16	11/16	1 3/8										
211-4	2 11/16	1/4	1/2										
211-8	2 11/16	1/2	1	23032	19,000	12	11 3/8	2 1/2	4	2	4	1	150
211-9	2 11/16	9/16	1 1/8										
27-12	2 7/16	3/4	1 1/2										
215-6	2 15/16	3/8	3/4										
215-8	2 15/16	1/2	1										
215-10	2 15/16	5/8	1 1/4									3/4	
215-24	2 15/16	1 1/2	3										
37-4	3 7/16	1/4	1/2										
315-6	3 15/16	3/8	3/4										
415-6	4 15/16	3/8	3/4										

**Bearing capacity (in pound force) determined at 300 RPM.

*Also available in 1 1/2 inches; must specify.


RUBBER MOUNTED SHAKER HANGERS



LH6450




GH2013


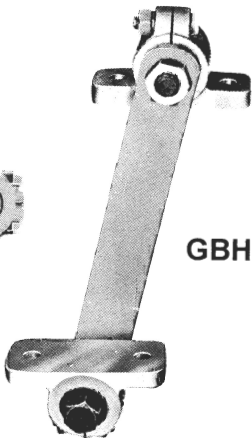


GBH2013


SUGGESTED METHODS OF INSTALLATION



TYPE GH2013 AND LH6450

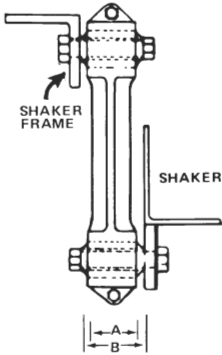


TYPE GBH2013





DIMENSIONS IN INCHES

Type	Centers	Load Cap Per Hanger	A Dim.	B Dim.	Recommended Limit of Travel	Max.Stroke Per Min.
GBH2013	9	175	2	2 5/16	1 1/2	800
GH2013	8 or 9	175	2	2 5/16	1 1/2	1000
LH6450	8 or 9	175	2	2 5/8	1 1/2	1000





GB2013 Bearings Only with Rubber Bushings



DIMENSIONS IN INCHES									
Type	A	B	C	D	E	F	G	H	Load Cap. Per. Hanger
GB2013	2 5/16	1 7/8	4 1/4	3	9/16	1 1/16	7/16	5/8	175 lbs.

RUBBER MOUNTS FOR HANGERS & CONNECTING ARMS




BUSHINGS ONLY FOR HANGERS AND CONNECTING ARMS - DIMENSIONS IN INCHES

No.	A	B	C	D
H-5013	2	1 1/2 Rnd	5/8	2 5/8
H-5017	1 1/2	1 1/2 Rnd	5/8	2 1/8
G-2013	2	1 1/4 Rnd	5/8	2 5/16
C-5950* †	1 1/4	2 3/8 Rnd	1	2 1/4
J-375*	3	3 1/8 Rnd	1 1/4	3 3/4
H-6450*	1 5/16	1 3/4 Sq.	5/8	2 5/8


* Does not have steel outer sleeve.
† Replacement for J-5950. Inner steel sleeve not required.

OUTER STEEL SLEEVES FOR RUBBER MOUNTS

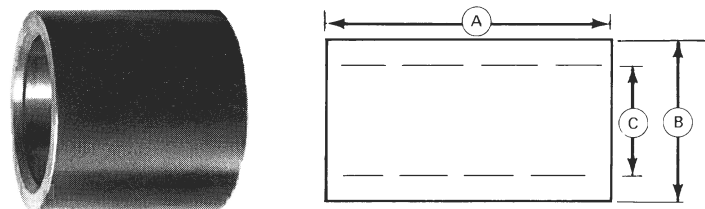

Dimensions in inches			
No.	A	B	C
5013 S	2	2	1½
5017 S	1½	2	1½
2013 S	2	1¾	1¼
5950 S	2	3¼	2 ⁷ / ₃₂
375 S	3½	4	3

RUBBER MOUNTED CONNECTING ARMS
FOR BALL BEARING ECCENTRICS

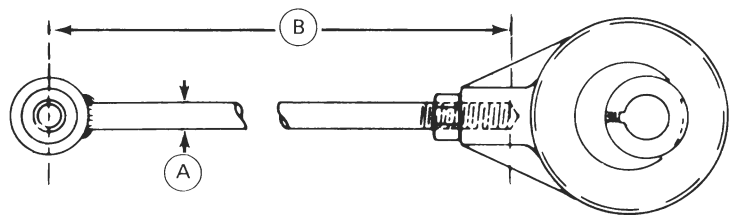

Rubber Mount No.	Rod Diameter "A" Dim.	Rod Length "B" Dim.
H-5013	¾" thru 1"	Rod Length to your specifications
H-5017		
G-2013		
C-5950	1" - 1¼" - 1½"	Rod Length to your specifications
J-375		

To order, specify Rubber Mount, Rod Diameter (A) and Rod Length (B).

Commercial
MANUFACTURING

P.O. Box 947, Fresno, California 93714-0947
2432 South Railroad Ave. Fresno California
93706-5187
Phone (559)237-1855 Fax (559)266-5149
Parts email parts@commercialmfg.com
Machinery email info@commercialmfg.com